


## Ordering Information

### Series 2500 Percent O<sub>2</sub> Transmitter

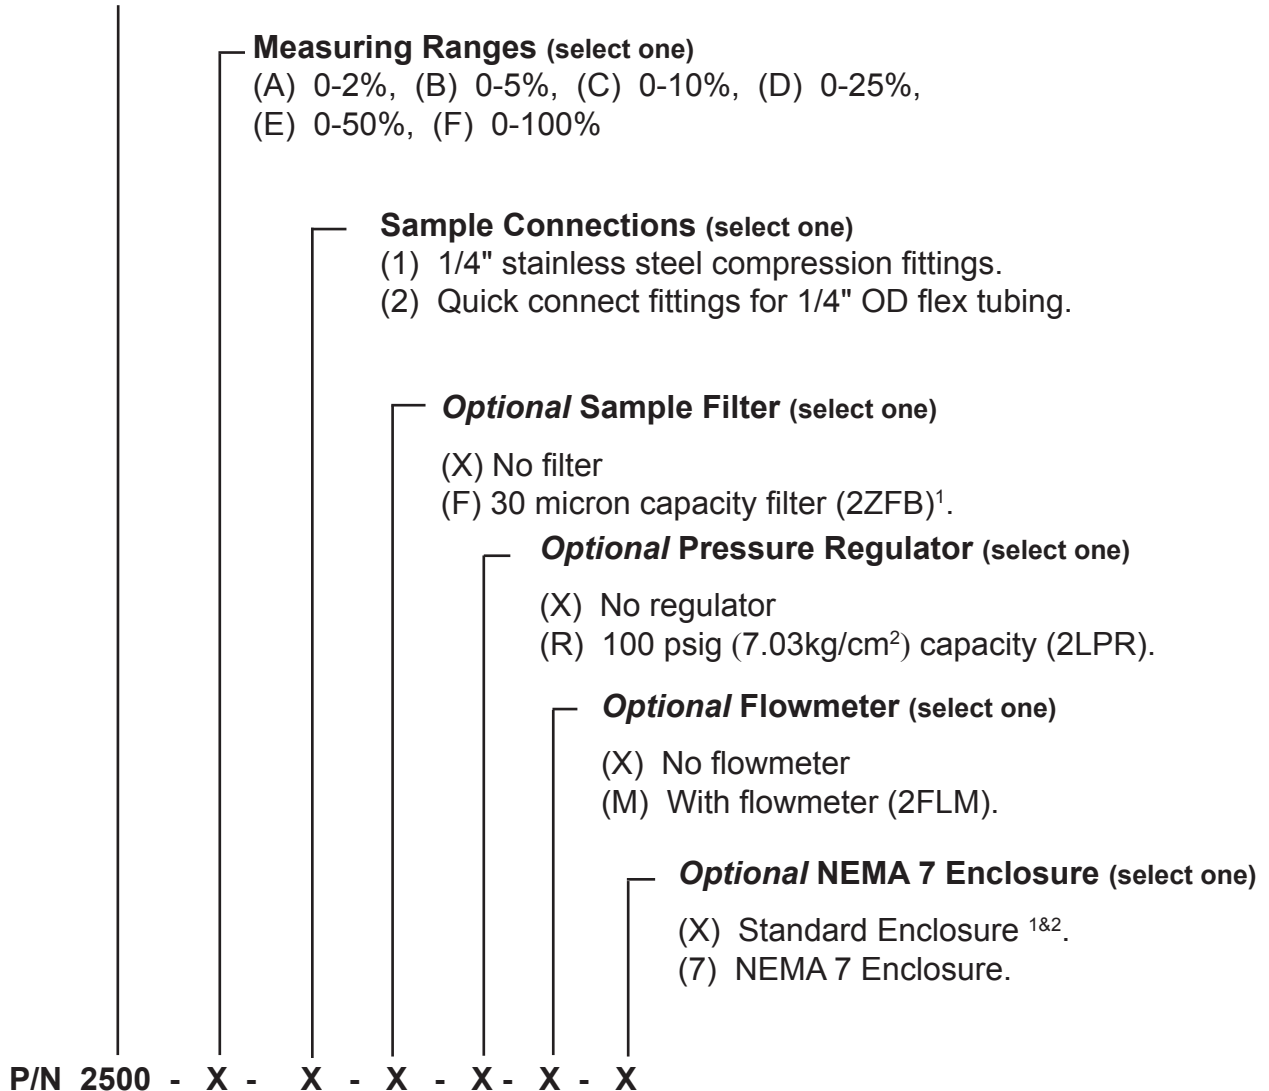

Configuration example :Series 2500 Percent Oxygen Transmitter with a range of 0-5%, 1/4" Stainless Steel compression fittings, optional flowmeter, and optional NEMA 7 Enclosure (p/n 2500-B-1-X-X-M-7)

- Notes:
1. The filter used with the explosion proof enclosure is the 295S. This filter has a stainless steel housing along with a stainless steel sintered filter.
  2. The standard Series 2500 Percent Oxygen Transmitter is housed in a NEMA 4 (watertight) housing. If equipped with the optional NEMA 7 enclosure, the instrument can be used in areas requiring Class 1, Groups B, C, D, Div 1; or Class II, Groups E, F, G; or Class III equipment.
  3. Replacement sensor part number 2SEN